
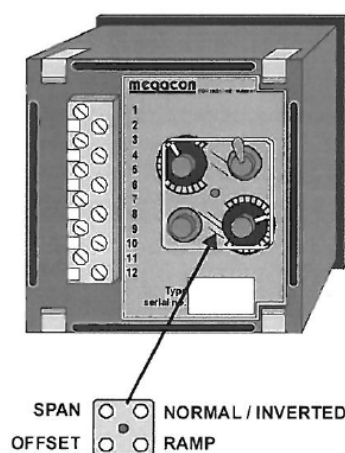


MXR846 Terminal	MXR845CI Terminal
1	1
2	2
3	14
4	15
5	16
7	11
8	12
9	6
10	8
11	not available
12	not available

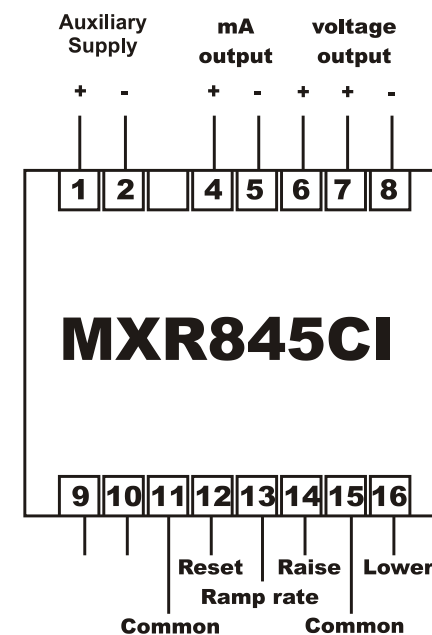

The “AUTO-MANUAL” selection function of the MXR846 is not incorporated into the MXR845CI, which operates permanently in “auto” mode.

MXR846 ramp rate = 10 - 150s
 MXR845CI ramp rate is dependant on input T13:
 T13 open: ramp rate = 3 - 30s
 T13 closed to T11: ramp rate = 30 - 300s

On the MXR845CI, “RAMP” is “Response”

The MXR845CI does not feature the “invert” switch.



Megacon International - Norway - UK - Denmark

www.megacon.com

Terminal connection changes: MXR846 to MXR845CI.

MTD MXR84x 001

Drawn:

Checked:

AN