



- Direct connection up to 690V line voltage
- Monitoring during both live and standby conditions
- For use in land, marine, offshore, sub-sea and ocean floor installations
- Comply with AODC 035 Code of Practice
- "Megger" - safe to 1.4kVDC when aux power is OFF
- Immune to earth capacitance and voltage surges
- Analogue output proportional to meter reading (F-version)
- Optional slave indicator

Specifications

General

Auxiliary Supply:	100-120, 200-240, 380-415 or 440-460VAC, 40-70Hz (Fuse 0.5A)
Optional Voltage:	12-24, 48 or 110VDC (Fuse 2A)
Contact rating:	AC: 100VA - 250V/2A max. DC: 50W - 100V/1A max.
Analogue Output: F-versions	Up to 20mA, max 500R Up to 10V, min 100kohm (other on request)
Temperature:	-20 to +70°C
Weight:	0.6kgs
Front protection:	IP21

INTELLIGENT SETTING ASSISTANCE

KCM161x has a built-in Assistance tool for setting/verification of the trip levels and the analogue output.

When either the **Warning** or **Alarm potmeter** on the front is operated by user, the slave meter goes into **Assistance Mode** and meter reading and analogue output will reflect the potmeter setting.

How to set alarm levels:

Firstly adjust potmeter fully clockwise (see that slave meter goes to the top), then adjust potmeter down to required **Warning** or **Alarm** setpoint.



Without any movement of potmeters, the meter will revert to normal Insulation Monitoring Mode after approximately 10 seconds.


How to test analogue output signal:

Adjust any trip level potmeter to activate Assistance Mode. **Example:** On a 4-20mA output, adjust potmeter fully anti clockwise for 4mA and fully clockwise for 20mA.

Application

The digitally controlled KCM161x series monitors insulation level between a non-grounded (IT) AC mains and its protective earth, regardless of whether the mains is live or non-live (standby). The unit is for land, marine, offshore, sub-sea and ocean floor use.

An AC or DC auxiliary voltage is required for the unit, if powered from a separate source the network can also be monitored during standby conditions. Only **ONE** KCM161x can be connected to each IT-system. The ohmmeter and the triple-zone status LEDs give at a glance the clear safety message:

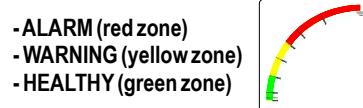

General

IDV MEASURING PRINCIPLE

Insulation is measured between the complete galvanically interconnected AC network and its protective earth. The unit injects a DC voltage signal into the monitored system. The signal flows to ground via the path of the insulation fault, the level of flow indicates the insulation resistance. The measuring accuracy is not influenced by any normal kind of load attached to the AC network.


Trip levels and delays are settable on unit rear. A trip LED flashes when the trip level is passed, the relay trips when the delay has elapsed. The timer resets if the fault is removed during countdown.

MEGGER SAFE


When auxiliary power is **OFF** the unit input is automatically protected against "megger" test voltages up to 1.4kVDC, and incorrect measurements caused by the unit's input impedance are avoided.

OUTPUTS

All F versions have an isolated **analogue output** proportional to meter reading. If output is used for remote meter reading, we recommend 0-1mA for the slave indicator.

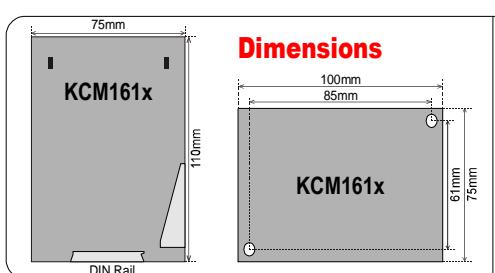


Dimensions for Slave instrument

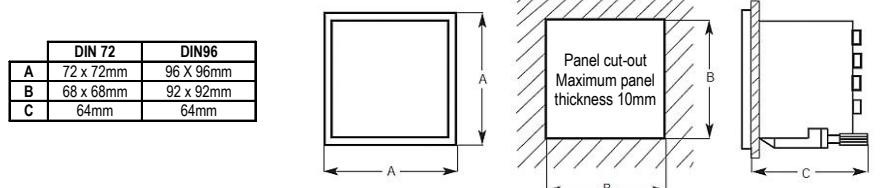

The KCM161x range is designed to comply with specification AODC035 "Code of Practice for the Safe Use of Electricity Under Water" issued by IMCA.

The unit meets IEC60092-504 and the relevant environmental and EMC tests specified in IEC60068/60092 and IEC61000/60533 respectively, to comply with the requirements of the major Classification Societies.

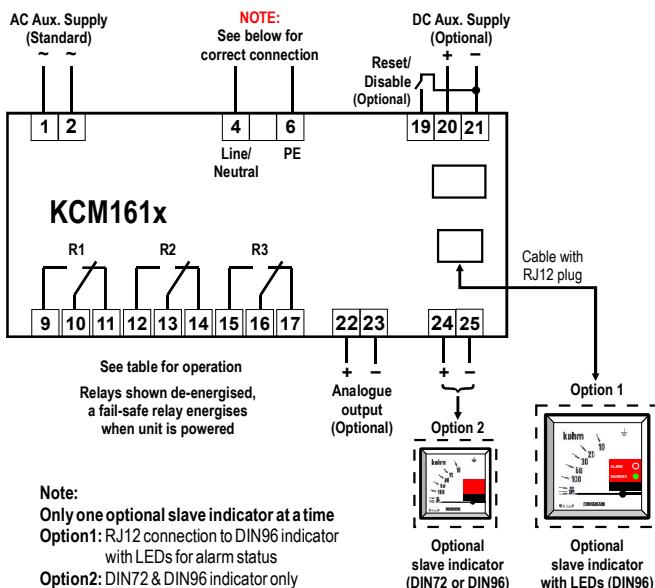

**Analogue Output**

KCM161F and KCM161GF have an analogue output proportional to meter reading. (Special outputs are available on request)

Add suffix from table below to type designation to specify output required:



O/P1	0 - 10mA	O/P6	N/A
O/P2	0 - 20mA	O/P7	N/A
O/P3	4 - 20mA	O/P8	0 - 10VDC
O/P4	N/A	O/P9	N/A
O/P5	N/A	O/P10	N/A

Reset / Parallelling Disable Function

KCM161x has a built-in disable function (available only when DC Aux. Supply is applied). When connecting two or more IT-networks together **only one unit** can be active, the other(s) must be disabled. When unit is disabled the power led will flash every 2 seconds to indicate that unit is inactive.

Use a potential free contact on terminal 19 and 21 to activate the disable function (after 2 secs). When activated the measuring input terminal 4 will be internally disconnected.

A pulse (60mS-2 Sec) on terminal 19,21 will only reset any latching alarm.

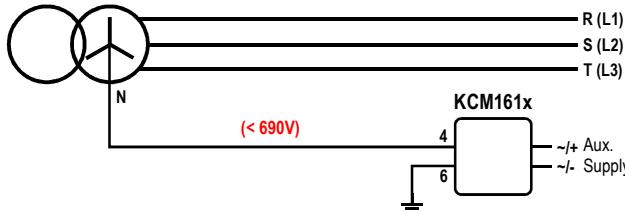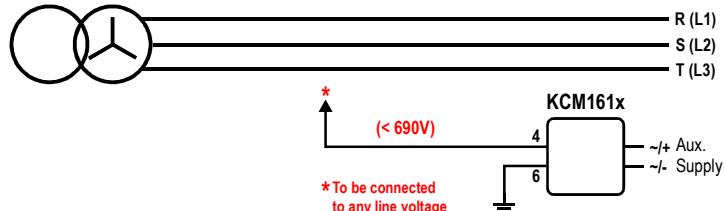NEUTRAL VOLTAGE INPUT**LINE VOLTAGE INPUT****Description****KCM161E2 & KCM161F - KCM161G & KCM161GF**


This unit is used for hospital, industrial, marine and offshore installations. Start of monitoring function is delayed when auxiliary power is switched on (default 5 secs delay). The unit has minimum 150 mS detection time for any insulation fault.

Direct connection up to 690V line voltage.

NOTE: Special versions of the KCM161x are available as:

KCM161xM series - Insulation Guards with DC detection function, protected against **high-energy DC** voltage imposed on the monitored AC supply.

KCM261x series - Insulation Guards with measuring loop continuity monitoring.

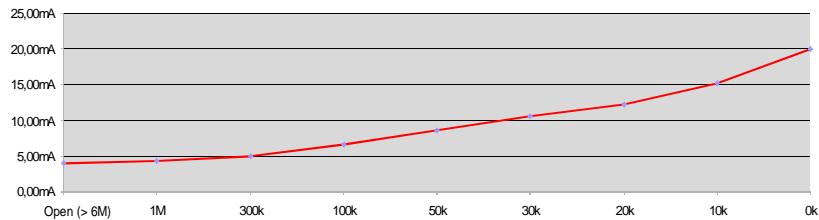Output diagram**Relay Operation**

Scale range: 0-1000kΩ ~ (>6MΩ)


	Warning	Alarm	Fail Safe	Latch
R1	✓			
R2		✓	✓	*✓
R3		✓	✓	*✓
Model	Latch	Output	Adjustments	Trip level
KCM161E2	-	-	WARNING: 0-1MΩ	0-30secs
KCM161F	-	X	ALARM: 0-1MΩ	0,1-3secs
KCM161G*	X			
KCM161GF*	X	X		

Coloured sectors show recommended areas of settings:

- Red - Indicates alarm trip zone
- Yellow - Indicates warning trip zone
- Green - Indicates healthy zone

Output table (example for 4-20mA)

Value (scale)	mA output
0kΩ	20.00mA
10kΩ	15.22mA
20kΩ	12.32mA
30kΩ	10.61mA
50kΩ	8.68mA
100kΩ	6.69mA
300kΩ	4.98mA
1MΩ	4.28mA
Open (>6M)	4.00mA

Range (slave indicator)

The MEGA CON policy is one of continuous improvement, consequently equipment supplied may vary in detail from this publication.

ORDERING EXAMPLE:

Type: KCM161F
Aux. Supply: 200-240VAC
Network Voltage: Up to 690VAC
Analogue O/P: (O/P3) 4-20mA
Range: 0 - 1000kohm

